



TX61C series

Low Power Voltage Detector

Features

- Low power consumption
- Low temperature coefficient
- Built-in hysteresis characteristic
- High input voltage (up to 8V)
- Output voltage accuracy:
 - ±2%@VDET ≥ 2.5mV
 - ±50mV@VDET < 2.5mV
- SOT23-3 and SOT23 package

Applications

- Battery checkers
- Level selectors
- Power failure detectors
- Microcomputer reset
- Battery memory backup
- Non-volatile RAM signal storage protectors

General Description

The TX61C series devices are a set of three terminal low power voltage detectors implemented in CMOS technology. Each voltage detector in the series detects a particular fixed voltage ranging from 0.9V to 5.0V. The voltage detectors consist of a high-precision and low power consumption standard voltage source as well as a comparator,

hysteresis circuit, and an output driver (CMOS inverter or NMOS open drain). CMOS technology ensures low power consumption.

Although designed primarily as fixed voltage detectors, these devices can be used with external components to detect user specified threshold voltages.

Selection Table

Part No.	Det. Voltage	Hys. Width	Output	Tolerance	Package
TX61CC0902MR	0.9V	4%	CMOS	± 50mV	SOT23-3 SOT23
TX61CN0902MR	0.9V	4%	NMOS	± 50mV	
TX61CC1002MR	1.0V	4%	CMOS	± 50mV	
TX61CN1002MR	1.0V	4%	NMOS	± 50mV	
...	
TX61CC2402MR	2.4V	4%	CMOS	± 50mV	
TX61CN2402MR	2.4V	4%	NMOS	± 50mV	
TX61CC2502MR	2.5V	4%	CMOS	±2%	
TX61CN2502MR	2.5V	4%	NMOS	±2%	
...	±2%	
TX61CC5002MR	5.0V	4%	CMOS	±2%	
TX61CN5002MR	5.0V	4%	NMOS	±2%	



TX61C series Low Power Voltage Detector


Order Information

TX61C①②③④⑤⑥⑦


Designator	Symbol	Description
①	C	CMOS output
	N	NMOS output
②③	VOUT	Output Voltage(0.9~5.0V)
④⑤	02	Standard
⑥	M	Package:SOT23-3
	N	Package:SOT23
⑦	R	RoHS / Pb Free
	G	Halogen Free

Block Diagram

(1) CMOS Output

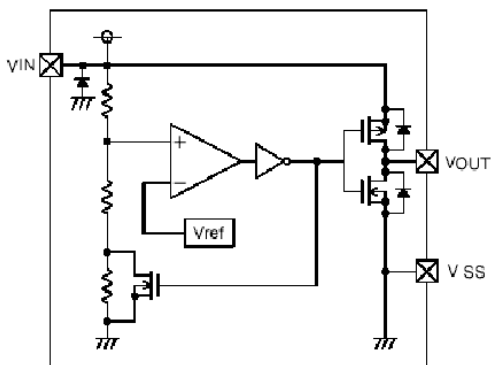


(2) N-ch Open Drain Output

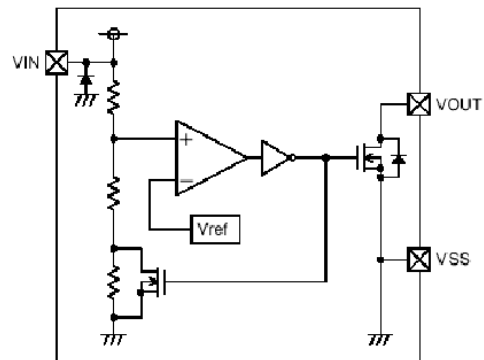




Output Table & Curve

V_{DD}	$V_{DD} > V_{DET}(+)$	$V_{DD} \leq V_{DET}(-)$
V_{OUT}	Hi-Z	V_{SS}

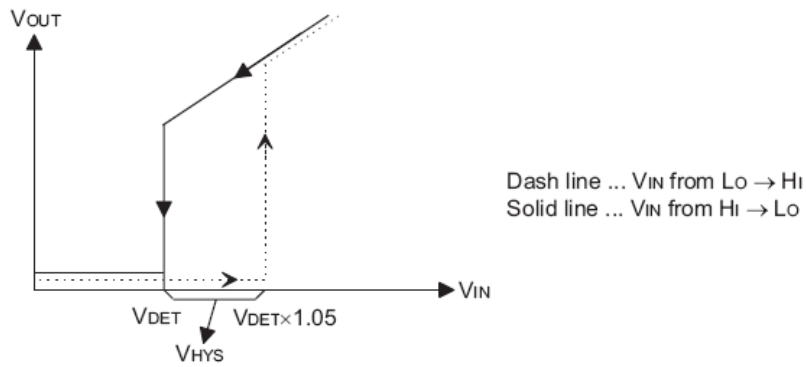


Pin Assignment

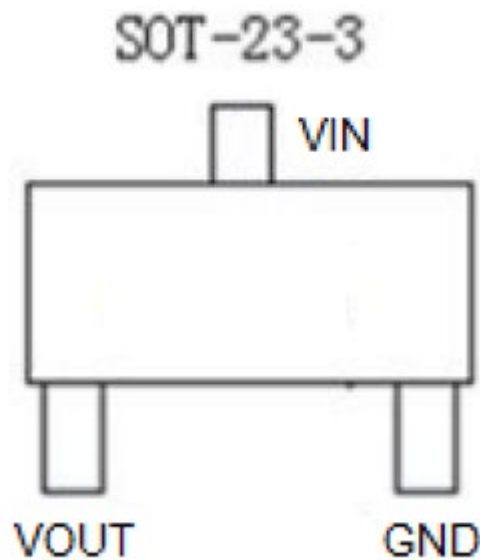



Marking Rule



① Represents integer of detect voltage and CMOS Output

MARK	CONFIGURATION	VOLTAGE (V)
A	CMOS	0.X
B	CMOS	1.X
C	CMOS	2.X
D	CMOS	3.X
E	CMOS	4.X
F	CMOS	5.X
H	CMOS	6.X

N-Channel Open Drain Output

MARK	CONFIGURATION	VOLTAGE (V)
K	N-ch	0.X
L	N-ch	1.X
M	N-ch	2.X
N	N-ch	3.X
P	N-ch	4.X
R	N-ch	5.X
S	N-ch	6.X

② Represents decimal number of detect voltage

MARK	VOLTAGE (V)	MARK	VOLTAGE (V)
0	X.0	5	X.5
1	X.1	6	X.6
2	X.2	7	X.7
3	X.3	8	X.8
4	X.4	9	X.9

③ Represents accuracy

MARK	ACCURACY
3	2%
1	1%

④ Represents production lot number

Based on the internal standard. (G, I, J, O, Q, W excepted)



TX61C series

Low Power Voltage Detector

<http://www.txsemi.com>

Absolute Maximum Ratings

Supply Voltage-0.3V to 10V Storage Temperature-50°C to 125°C
Operating Temperature-40°C to 85°C

Note: These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

Thermal Information

Symbol	Parameter	Package	Max.	Unit
θ_{JA}	Thermal Resistance (Junction to Ambient) (Assume no ambient airflow, no heat sink)	SOT23-3	500	°C/W
P_D	Power Dissipation	SOT23-3	0.20	W

Note: P_D is measured at $T_a = 25^\circ\text{C}$

Electrical Characteristics

$V_{DF}=0.8V\sim 5.0V$



$T_a=25^\circ\text{C}$

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
V_{DET}	Detection Voltage	$V_{DF}=0.9V\sim 2.4V$		$V_{DET}-0.05$	V_{DET}	$V_{DET}+0.05$	V
		$V_{DF}=2.5V\sim 5.0V$		$V_{DET}*0.98$	V_{DET}	$V_{DET}*1.02$	V
V_{HYS}	Hysteresis Width	-		$0.02*V_{DET}$	$0.05*V_{DET}$	$0.10*V_{DET}$	V
I_{DD}	Operating Current	$V_{in}=1.5V$		-	0.7	2.3	μA
		$V_{in}=2.0V$		-	0.8	2.7	
		$V_{in}=3.0V$		-	0.9	3.0	
		$V_{in}=4.0V$		-	1.0	3.2	
		$V_{in}=5.0V$		-	1.1	3.6	
V_{DD}	Operating Voltage	-	-	0.7	-	10	V
I_{OL}	Output Sink Current	2V	$V_{OUT}=0.2V$	0.5	1	-	mA
$\frac{\Delta V_{DET}}{V_{DF}\Delta T_a}$	Temperature Coefficient	-	-25°C < T_a <125°C	-	± 100	-	ppm/°C





Typical Performance Characteristics

(1) Output Voltage vs Input voltage

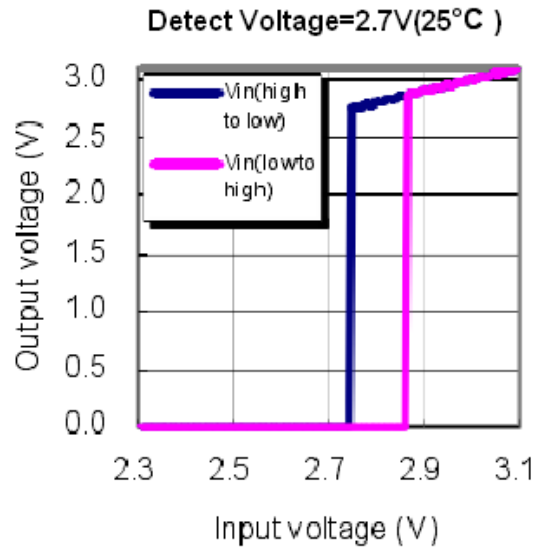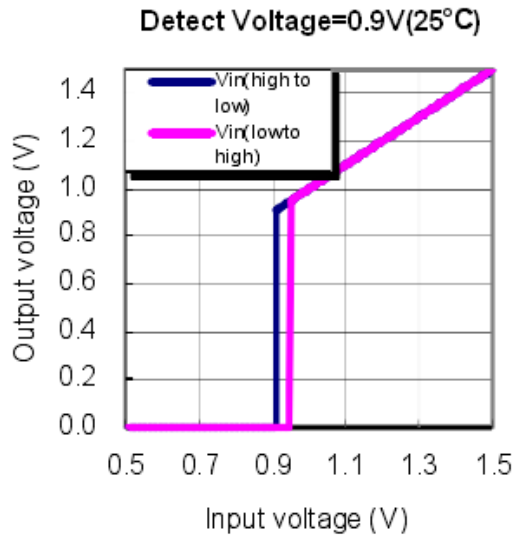

(2) Supply Current vs. Input Voltage

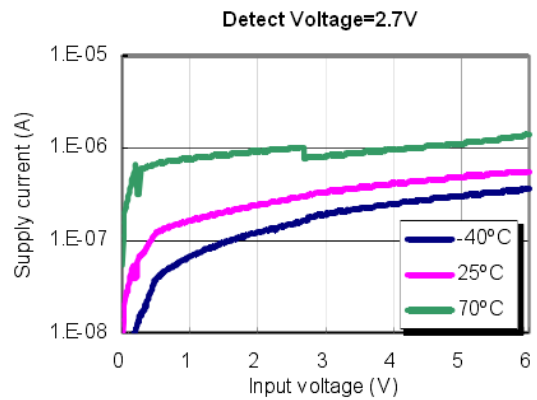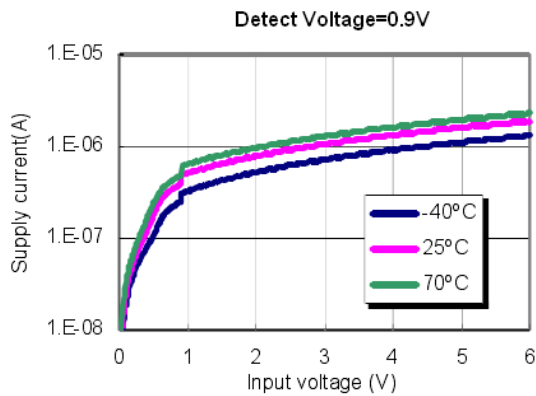




TX61C series Low Power Voltage Detector

Microcomputer Reset Circuit


Normally a reset circuit is required to protect the microcomputer system from malfunctions due to power line interruptions. The following examples show how different output configurations perform a reset function in various systems.

NMOS open drain output application for separate power supply

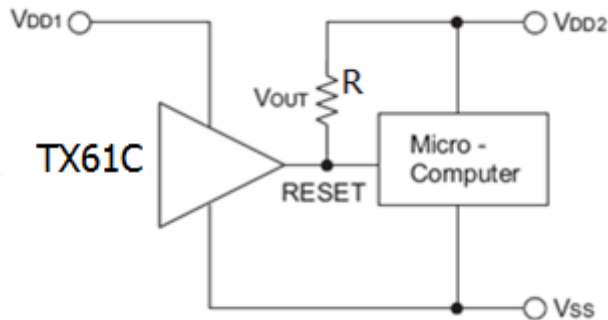

R=47K

CMOS output application

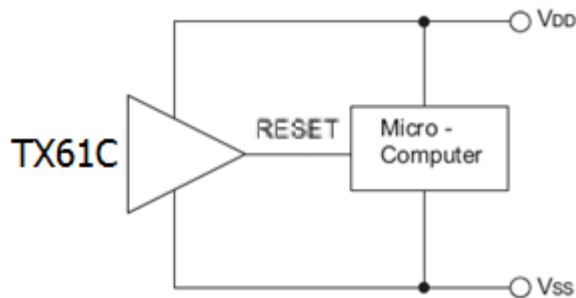




<http://www.txsemi.com>

TX61C series Low Power Voltage Detector

Package Information

3-pin SOT23-3 Outline Dimensions

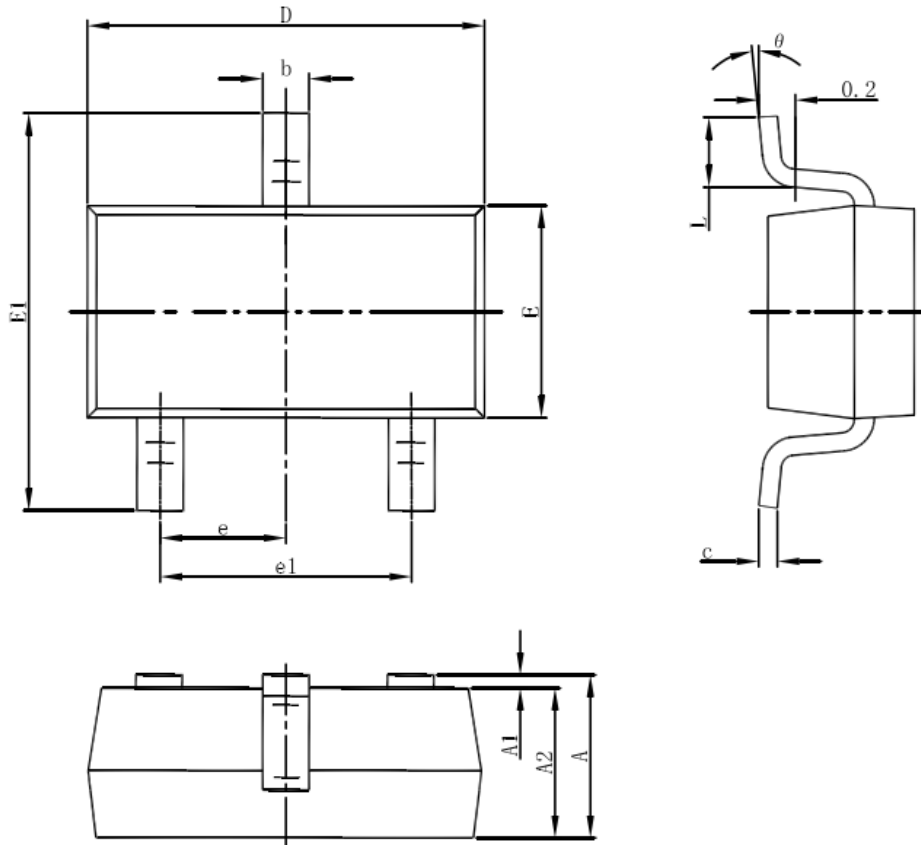


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°



<http://www.txsemi.com>

TX61C series Low Power Voltage Detector

3-pin SOT23 Outline Dimensions

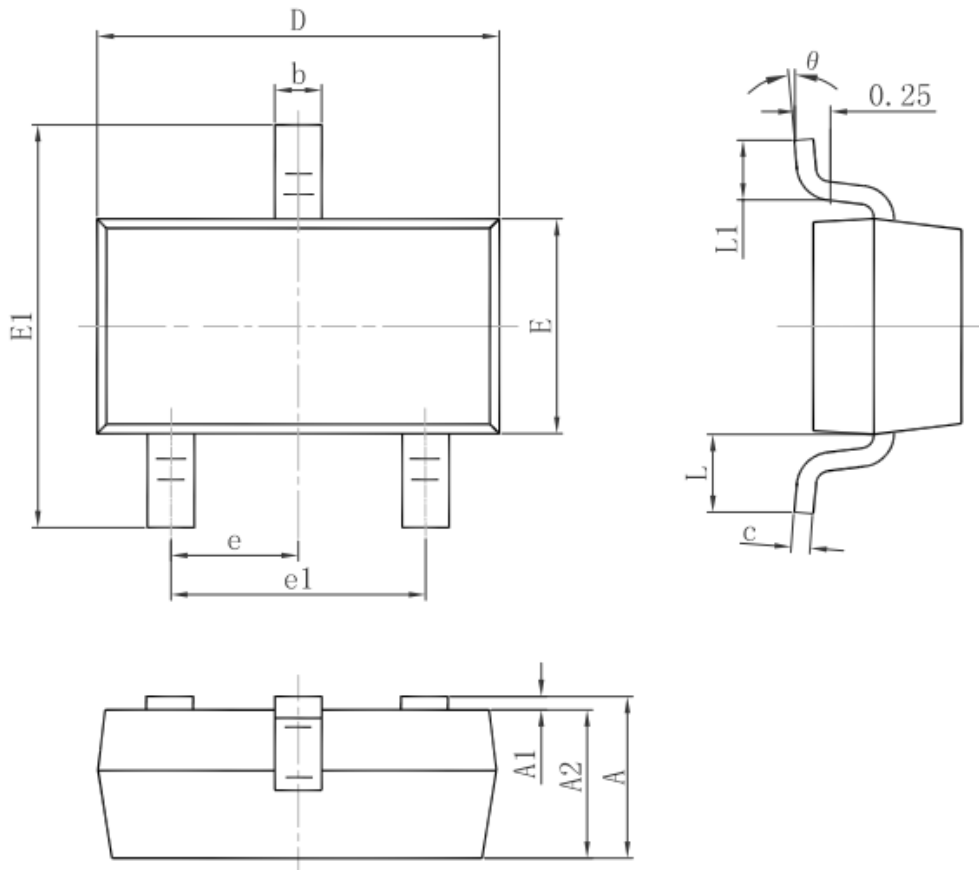

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°



<http://www.txsemi.com>

TX61C series Low Power Voltage Detector

© Shanghai TX Electronics Sci-Tech Co., Ltd

TX cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a TX product. No circuit patent license, copyrights or other intellectual property rights are implied. TX reserves the right to make changes to their products or specifications without notice. Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.

说明书更改说明:

版本	操作者	日期	更改内容	更改来源
1.2	郭玲博	2019-3-28	精度范围以 2.5V 划分, 2.5V 以下是 $\pm 50\text{mV}$, 2.5V 以上是 $\pm 2\%$	测试说明。