



### Features

- Low power consumption
- Low voltage drop
- Low temperature coefficient
- Low Quiescent Current: 5uA at 6V
- Output voltage accuracy: tolerance  $\pm 2\%$

### Applications

- Battery-powered equipment
- Reference voltage sources
- Cameras, video cameras
- Portable AV systems
- Mobile phones
- Portable games

### General Description

TX6206 series are a highly precise, lower consumption, 3 terminal, positive voltage regulators manufactured using CMOS and laser trimming technologies. The series provides large currents with a significantly small dropout voltage. The TX6206 consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error correction circuit. The series is

compatible with low ESR ceramic capacitors. The current limiter's foldback circuit operates as a short circuit protection as well as the output current limiter for the output pin. Output voltages are internally by laser trimming technologies. It is selectable in 0.1V increments within a range of 1.2V to 5.0V. TX6206 series are available in SOT-23, SOT23-3 and SOT-89 packages.

### Order Information


#### TX6206-①②③④

Designator	Symbol	Description
①②	Integer	Output Voltage (1.2~5.0V)
③	N	Package: SOT23
	M	Package: SOT23-3
	P	Package: SOT89
④	R	RoHS / Pb Free
	G	Halogen Free

Note: "①②" stands for output voltages. Other voltages can be specially customized




**Block Diagram**

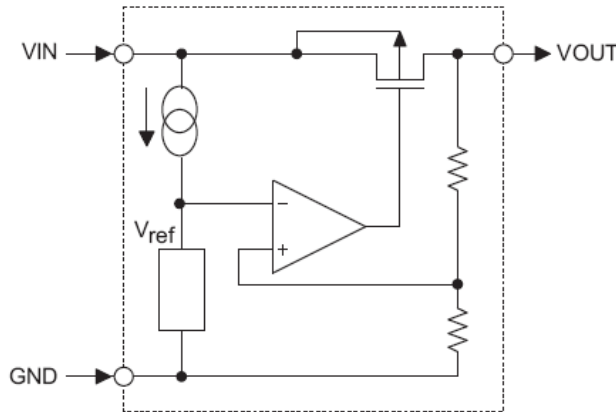

**Pin Assignment**


SOT23 and SOT23-3 (Top View)

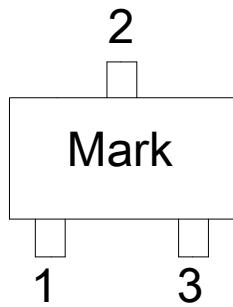

**Table1:** TX6206-XXNR/TX6206-XXMR series (SOT23/SOT23-3 PKG)

PIN NO.	PIN NAME	FUNCTION
1	GND	GND pin
2	VIN	Input voltage pin
3	VOUT	Output voltage pin

SOT89 (Top View)

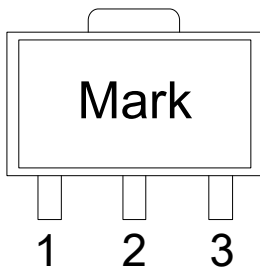

**Table2:** TX6206-XXPR series (SOT89 PKG)

PIN NO.	PIN NAME	FUNCTION
1	GND	GND pin
2	VIN	Input voltage pin
3	VOUT	Output voltage pin




**TX6206**


<http://www.txsemi.com>

**300mA Low Power LDO**

**Marking Rule**

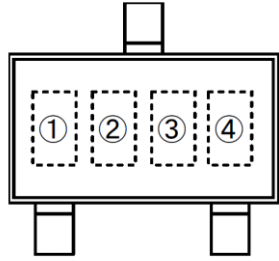

SOT-23  
(TOP VIEW)

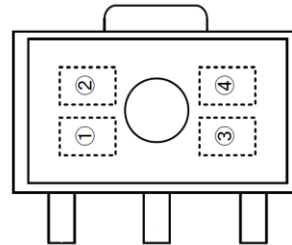

SOT-89  
(TOP VIEW)

① represents product number

MARK	PRODUCT SERIES
6	TX6206****

② represents 3 pins regulator

MARK		PRODUCT SERIES
VOLTAGE=0.1~3.0V	VOLTAGE=3.1V~6.0V	
5	6	TX6206

③ represents output voltage

MARK	VOLTAGE(V)			MARK	VOLTAGE(V)		
0	-	3.1	-	F	1.6	4.6	-
1	-	3.2	-	H	1.7	4.7	-
2	-	3.3	-	K	1.8	4.8	-
3	-	3.4	-	L	1.9	4.9	-
4	-	3.5	-	M	2.0	5.0	-
5	-	3.6	-	N	2.1	-	-
6	-	3.7	-	P	2.2	-	-
7	-	3.8	-	R	2.3	-	-
8	-	3.9	-	S	2.4	-	-
9	-	4.0	-	T	2.5	-	-
A	-	4.1	-	U	2.6	-	-
B	1.2	4.2	-	V	2.7	-	-
C	1.3	4.3	-	X	2.8	-	-
D	1.4	4.4	-	Y	2.9	-	-
E	1.5	4.5	-	Z	3.0	-	-

④ X



**TX6206**

**300mA Low Power LDO**

<http://www.txsemi.com>

**Absolute Maximum Ratings** (The following specifications apply for Ta=25°C, unless specified otherwise)

Parameter	Symbol	Ratings	Units
Input Voltage	V <sub>IN</sub>	8	V
Output Current	I <sub>OUT</sub>	300*	mA
Output Voltage	V <sub>OUT</sub>	V <sub>SS</sub> -0.3~V <sub>IN</sub> +0.3	V
Power Dissipation	SOT-23	P <sub>d</sub>	0.20
	SOT23-3		0.25
	SOT-89		0.50
Operating Temperature Range	T <sub>opr</sub>	-40~+85	°C
Storage Temperature Range	T <sub>stg</sub>	-55~+125	°C

\*I<sub>OUT</sub>=P<sub>d</sub>/(V<sub>IN</sub>-V<sub>OUT</sub>)

\*P<sub>d</sub> is measured at Ta=25°C

**Electrical Characteristics**

TX6206 for any output voltage

(Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V <sub>out</sub>	V <sub>in</sub> =V <sub>out</sub> +1V 1.0mA≤I <sub>out</sub> ≤30mA 1.2V≤V <sub>OUT</sub> ≤2.5V	V <sub>out</sub> -0.05	--	V <sub>out</sub> +0.05	V
		V <sub>in</sub> =V <sub>out</sub> +1V 1.0mA≤I <sub>out</sub> ≤30mA 2.5V≤V <sub>OUT</sub> ≤5.0V	V <sub>out</sub> ×0.98	--	V <sub>out</sub> ×1.02	V
Output Current*1	I <sub>out</sub>	V <sub>in</sub> -V <sub>out</sub> =1V	--	300	--	mA
Low dropout*2	V <sub>drop</sub>	Refer to the next table				
Line Regulation	ΔV <sub>out</sub> 1/(V <sub>in</sub> -V <sub>out</sub> )	1.6V≤V <sub>in</sub> ≤8V I <sub>out</sub> =40mA	--	0.05	0.2	%/V
Load Regulation	ΔV <sub>out</sub> /ΔI <sub>out</sub>	V <sub>in</sub> = V <sub>out</sub> +1V 1.0mA≤I <sub>out</sub> ≤80mA	--	12	30	mV
Output voltage Temperature Coefficiency	ΔV <sub>out</sub> /(Ta·V <sub>out</sub> )	I <sub>out</sub> =30mA 0°C≤Ta≤70°C	--	±50	--	Ppm/°C
Supply Current	I <sub>ss</sub>	--	--	5	8	uA
Input Voltage	V <sub>in</sub>	--	--	6	8	V
PSRR	PSRR	F=1KHz V <sub>in</sub> =V <sub>out</sub> +1V	--	55	--	dB
Output Noise	EN	BW=10HZ~100KHz	--	30	--	uVrms



# TX6206


## 300mA Low Power LDO

<http://www.txsemi.com>

Electrical Characteristics by Output Voltage:

Output Voltage Vout (V)	Dropout Voltage Vdif (V)		
	Conditions	Typ.	Max.
Vout ≤ 1.5V	Iout = 100 mA	0.35	0.57
1.8 ≤ Vout ≤ 2		0.28	0.42
2.8 ≤ Vout ≤ 5.0		0.19	0.35

### Typical Application

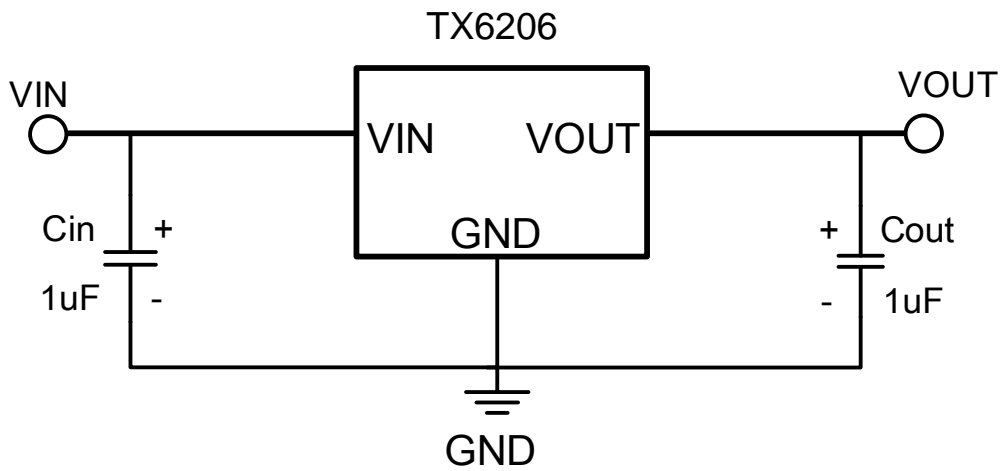



**TX6206**


<http://www.txsemi.com>

## 300mA Low Power LDO


### Typical Performance Characteristics

Note:  $C_{IN}=0.33\mu F$   $C_{OUT}=0.1\mu F$   $V_{OUT}=3.3V$   $T=25^{\circ}C$  unless specified otherwise


(1) Quiescent Current VS Input Voltage

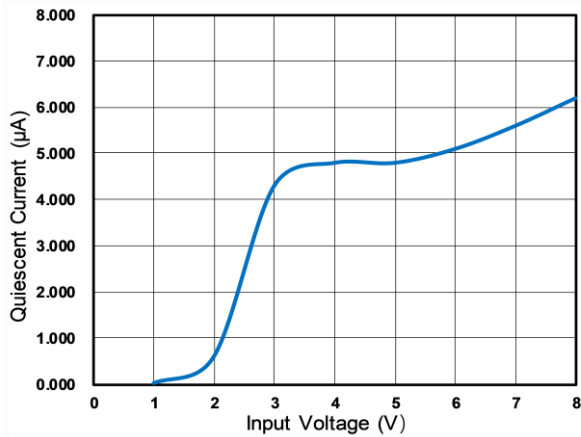


(2) Output Voltage VS Input Voltage

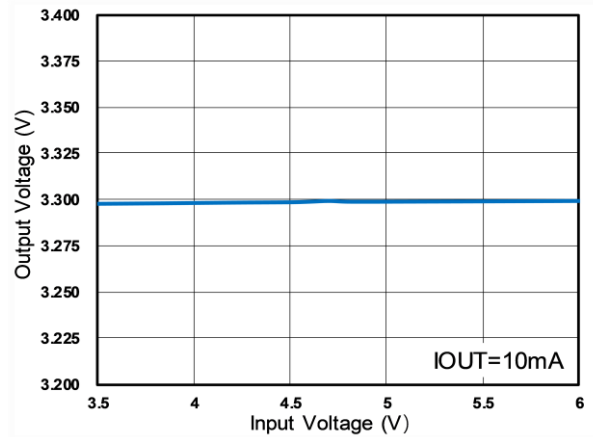


(3) Output Voltage VS Output Current

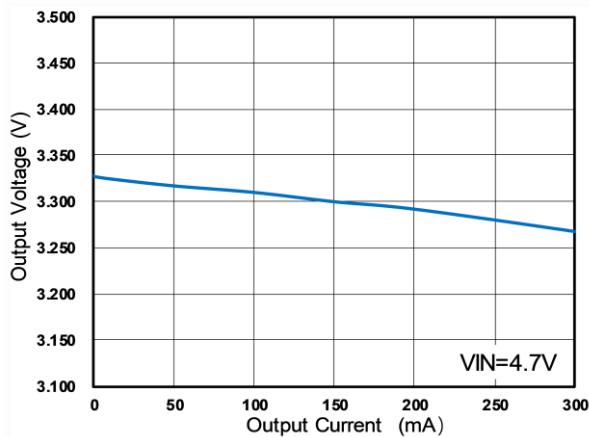


(4) Short-Circuit Current VS Input Voltage

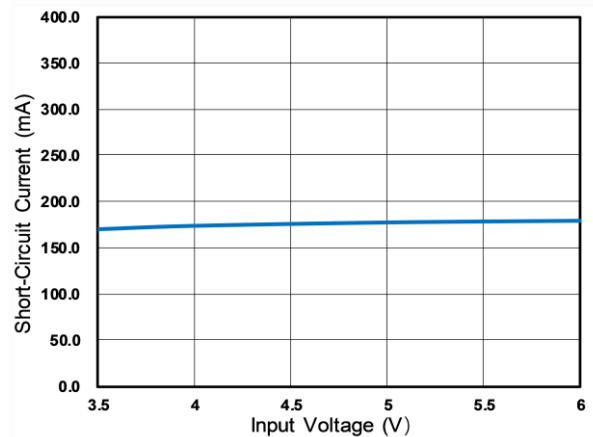

(5) Dropout Voltage VS Output Current

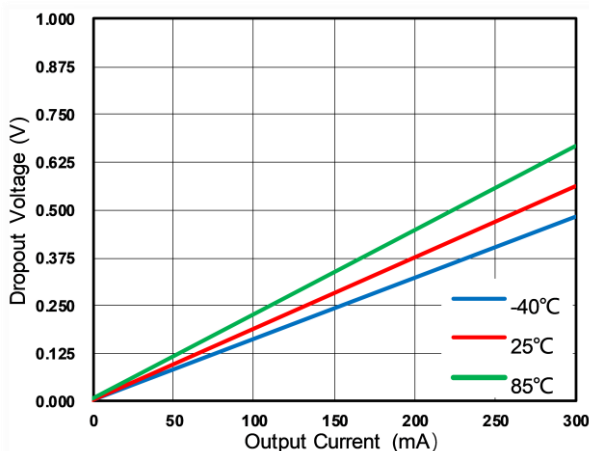

(6) Dropout Voltage VS Temperature

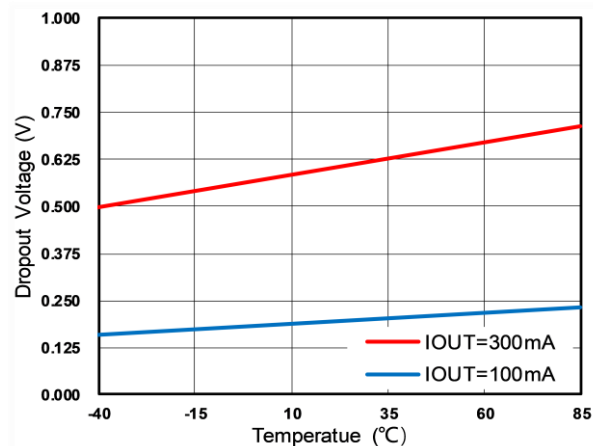




<http://www.txsemi.com>


# TX6206

## 300mA Low Power LDO


(7) Quiescent Current VS Temperature

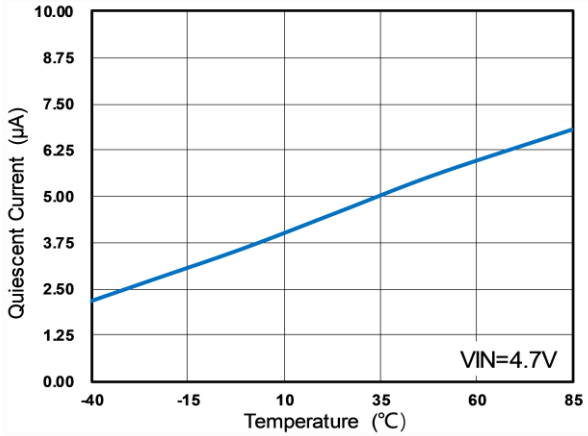


(8) Output Voltage VS Temperature

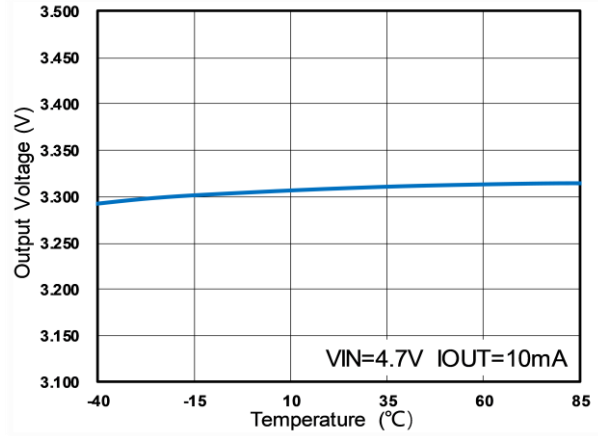


(9) Line Regulation VS Temperature

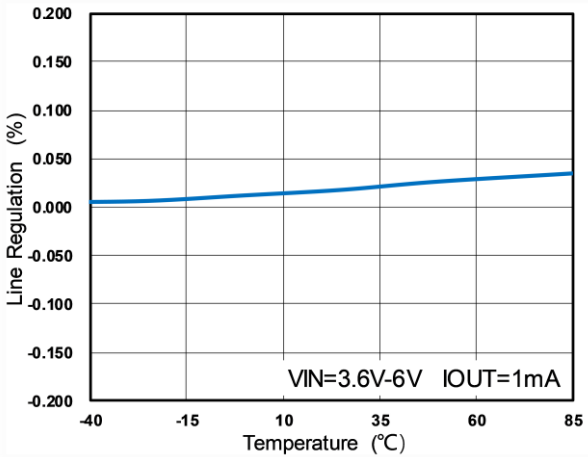


(10) Load Regulation VS Temperature

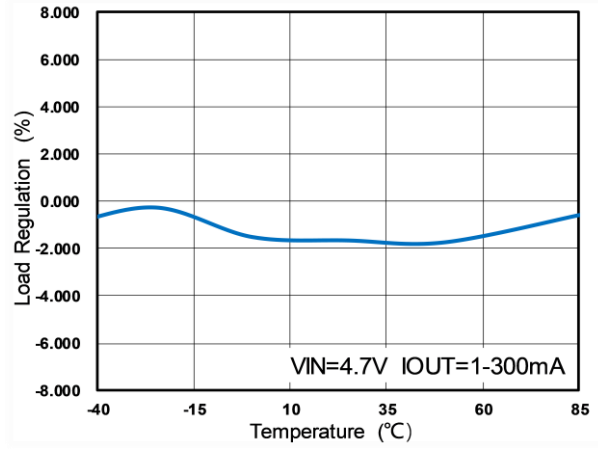

(11) Short-Circuit Current VS Temperature

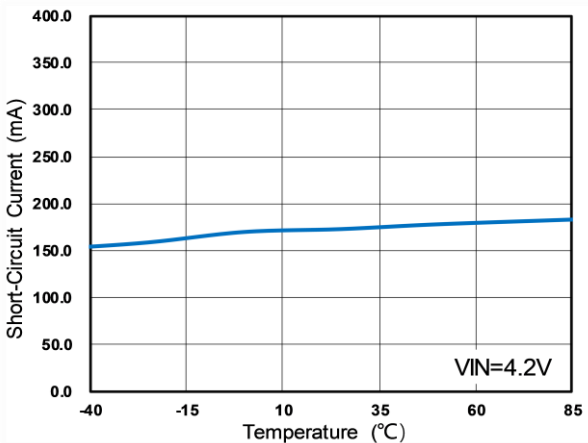

(12) PSRR

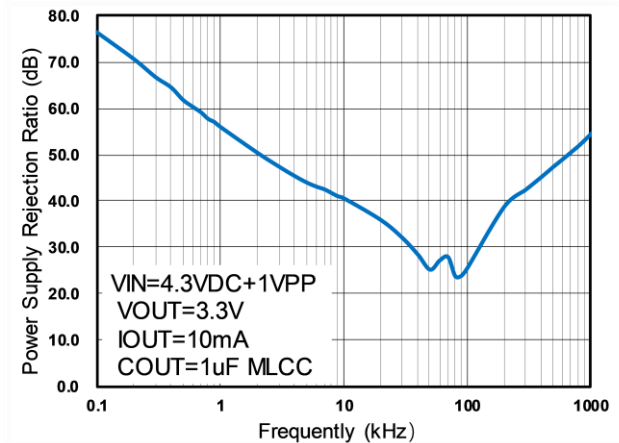




<http://www.txsemi.com>


# TX6206

## 300mA Low Power LDO


(13) Input Transient Response (VIN=3.6V-4.2V)

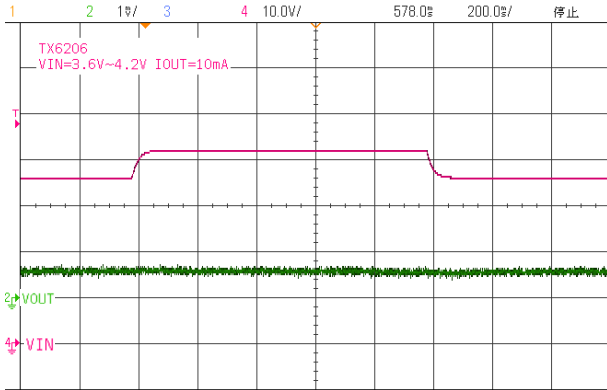


(14) Input Transient Response (VIN=3.6V-6.0V)

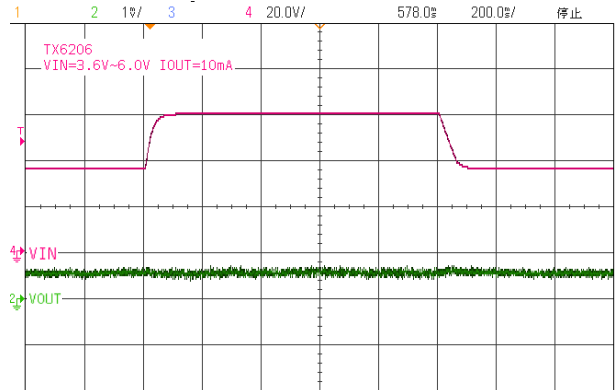


(15) Load Transient Response (IOUT=200mA-300mA)

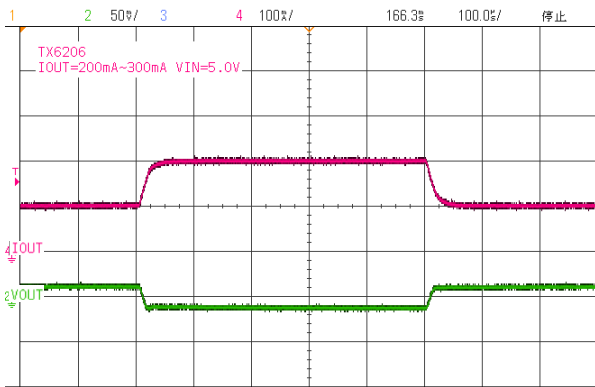


(16) Load Transient Response (IOUT=10mA-300mA)

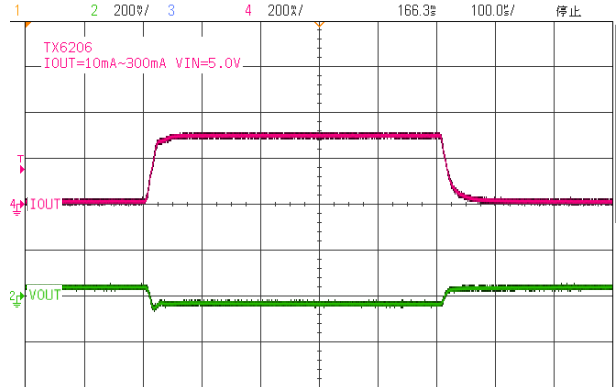

(17) Power ON (VIN=5.0V IOUT=10mA)

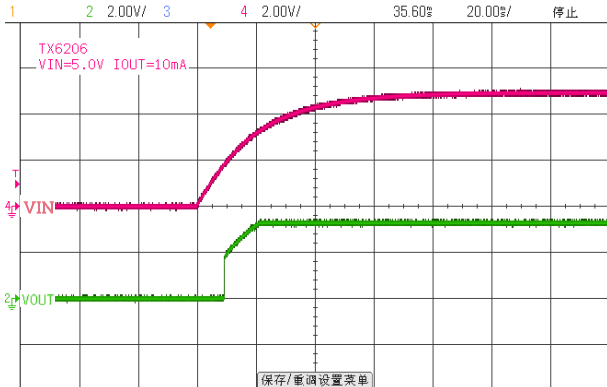

(18) Power OFF (VIN=5.0V IOUT=10mA)

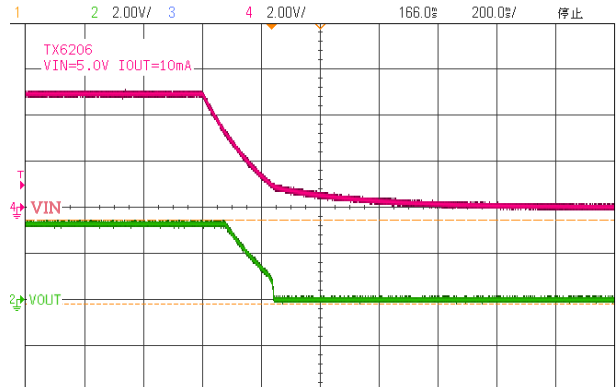






**TX6206**

<http://www.txsemi.com>

**300mA Low Power LDO**

**Package Information**

**3-pin SOT23 Outline Dimensions**

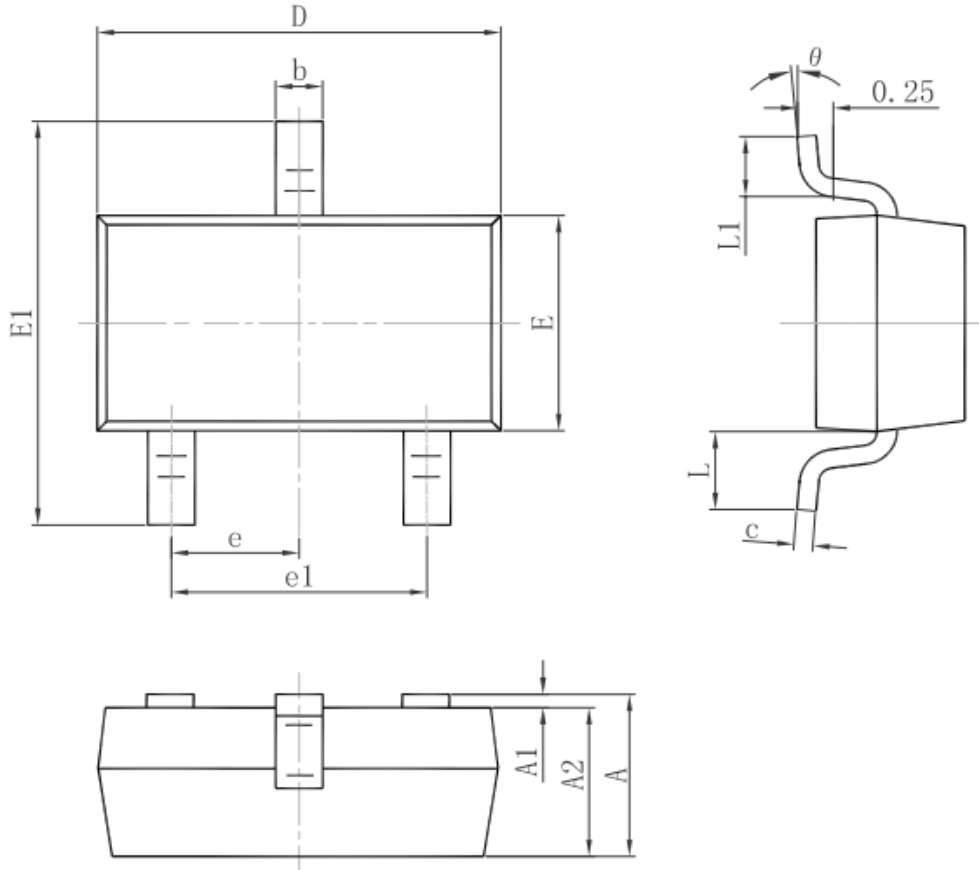

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°




**TX6206**

<http://www.txsemi.com>

**300mA Low Power LDO**

**3-pin SOT23-3 Outline Dimensions**

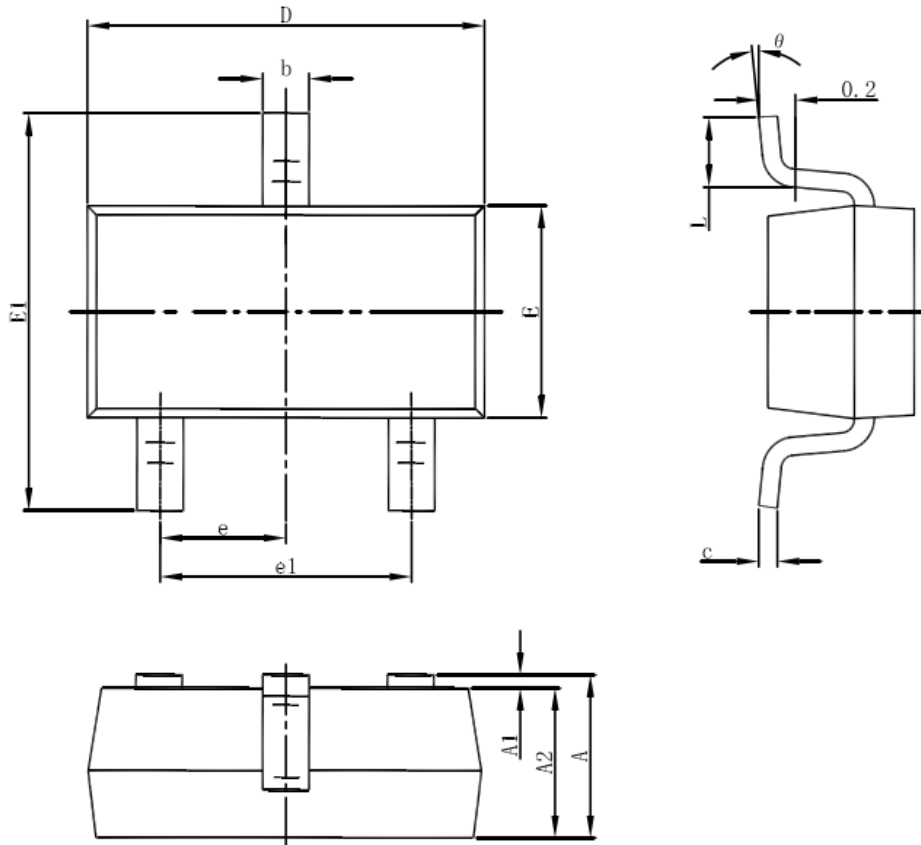

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°




**TX6206**

**300mA Low Power LDO**

<http://www.txsemi.com>

**3-pin SOT89 Outline Dimensions**

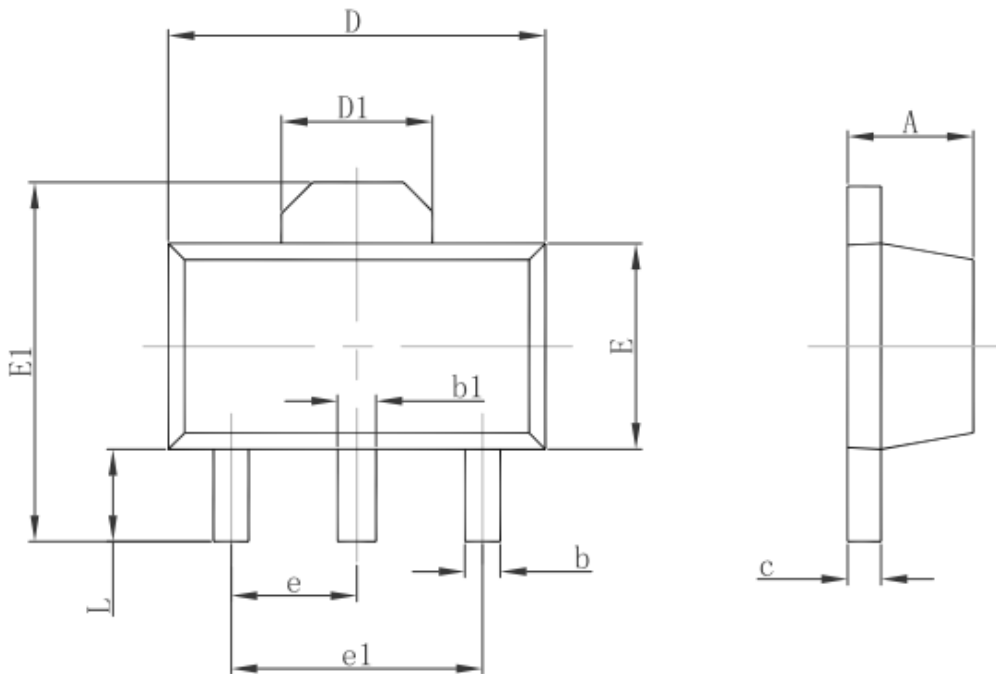

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047



<http://www.txsemi.com>

# **TX6206**

## **300mA Low Power LDO**

---

© Shanghai TX Electronics Sci-Tech Co., Ltd

TX cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a TX product. No circuit patent license, copyrights or other intellectual property rights are implied. TX reserves the right to make changes to their products or specifications without notice. Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete