



TX6211C High Speed Low Dropout Middle Current Voltage Regulators

<http://www.txsemi.com>

Features

- Output Voltage Range: 1.0V to 5.0V (selectable in 100mV steps)
- Highly Accurate: $\pm 2\%$
- Dropout Voltage: 0.17V @ 100mA (3.3V type)
- High Ripple Rejection: 70dB (10 kHz)
- Low Power Consumption: 70 μ A (TYP.)
- Maximum Output Current : 300mA
- Standby Current : less than 2 μ A
- Internal protector: current limiter
- Internal discharge MOS
- SOT-23-5L

Applications

- Mobile phones
- Cordless phones
- Cameras, Video cameras
- Portable games
- Portable AV equipment
- Reference voltage
- Battery powered equipment


General Description

The TX6211C series are highly precise, low noise, positive voltage LDO regulators manufactured using CMOS processes. The series achieves high ripple rejection and low dropout and consists of a standard voltage source, an error correction, current limiter and a phase compensation circuit plus a driver transistor. Output voltage is selectable in 100mV increments within a range of 1.5V ~ 5.0V. The series is also compatible with low

ESR ceramic capacitors which give added output stability. This stability can be maintained even during load fluctuations due to the excellent transient response of the series.

The current limiter's feedback circuit also operates as a short protect for the output current limiter and the output pin. The CE function enables the output to be turned off, resulting in greatly reduced power consumption.

Typical Application Circuit

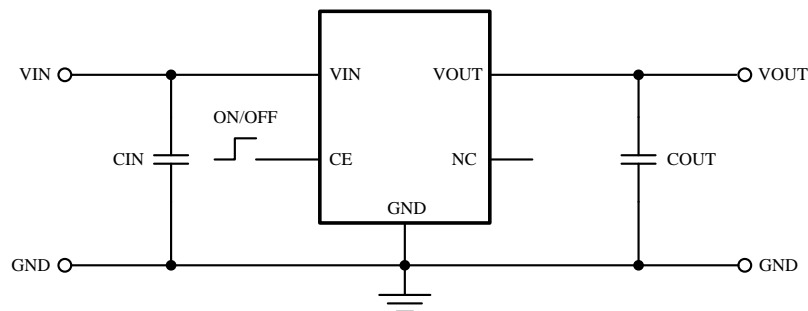

- Caution:**
1. The above connection diagram and constant will not guarantee successful operation. Perform thorough evaluation using the actual application to set the constant.
 2. Input capacitor (CIN): 1.0 μ F or more, Output capacitor (COUT): 1.0 μ F or more (tantalum capacitor)
 3. A general series regulator may oscillate, depending on the external components selected. Check that no oscillation occurs with the application using the above capacitor.



TX6211C High Speed Low Dropout Middle Current Voltage Regulators

<http://www.txsemi.com>


Order Information

TX6211C-①②③④

Designator	Symbol	Description
①②	Integer	Output Voltage
③	M5	Package:SOT23-5
④	R	RoHS / Pb Free
	G	Halogen Free


Note: "①②" stands for output voltages.

Block Diagram

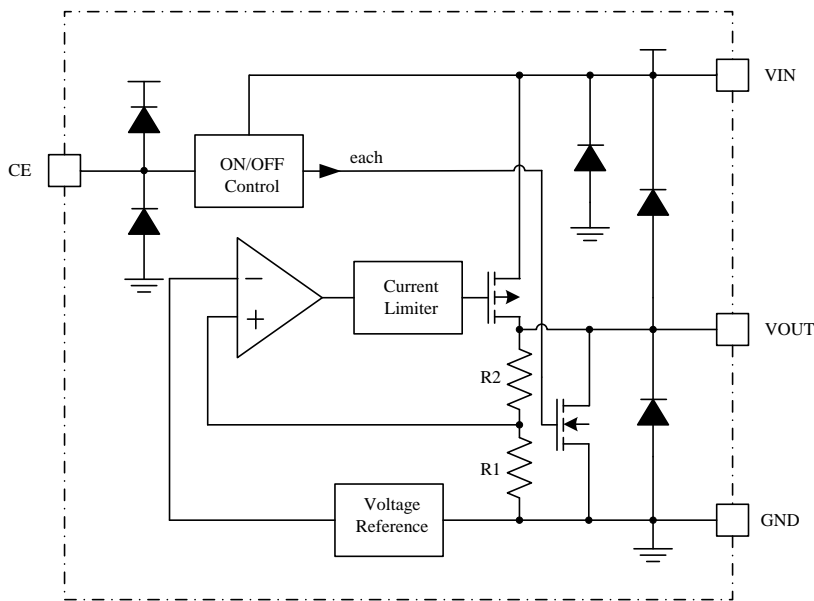

Pin configuration

SOT23-5 (Top View)

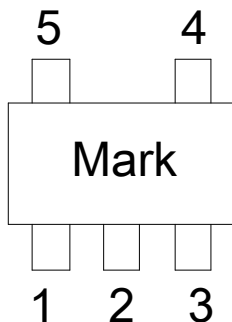

TX6211C series (SOT23-5 PKG)

PIN NO.	PIN NAME	FUNCTION
1	VIN	Input Voltage
2	GND	Ground
3	EN	Enable Pin
4	NC	
5	VOUT	Output Voltage




TX6211C High Speed Low Dropout Middle Current Voltage Regulators

<http://www.txsemi.com>

Marking Rule

SOT-23-5 (Top View)

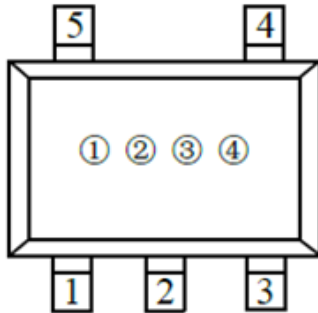

① Represents the product name

Symbol	Product Name
4	TX6211C

② Represents the type of regulator

Voltage(V)	1.0~3.0	3.1~6.0	1.05~3.05	3.15~6.05
Symbol	V	A	E	L
	X	B	F	M
	Y	C	H	N
	Z	D	K	P

③ Represents the decimals of Output Voltage

Symbol	Output Voltage (V)			
0		3.1		3.15
1		3.2		3.25
2		3.3		3.35
3		3.4		3.45
4		3.5		3.55
5		3.6		3.65
6		3.7		3.75
7		3.8		3.85
8		3.9		3.95
9	1.0	4.0	1.05	4.05
A	1.1	4.1	1.15	4.15
B	1.2	4.2	1.25	4.25
C	1.3	4.3	1.35	4.35
D	1.4	4.4	1.45	4.45
E	1.5	4.5	1.55	4.55

Symbol	Output Voltage (V)			
F	1.6	4.6	1.65	4.65
H	1.7	4.7	1.75	4.75
K	1.8	4.8	1.85	4.85
L	1.9	4.9	1.95	4.95
M	2.0	5.0	2.05	5.05
N	2.1		2.15	
P	2.2		2.25	
R	2.3		2.35	
S	2.4		2.45	
T	2.5		2.55	
U	2.6		2.65	
V	2.7		2.75	
X	2.8		2.85	
Y	2.9		2.95	
Z	3.0		3.05	

④ Represents the assembly lot No.

0~9, A~Z repeated (G, I, J, O, Q, W excepted)



TX6211C High Speed Low Dropout Middle Current Voltage Regulators

<http://www.txsemi.com>

Absolute Maximum Ratings

Parameter	Symbol	Maximum Rating	Unit
Input Voltage	V_{IN}	$V_{SS}-0.3 \sim V_{SS}+8$	V
	$V_{ON/OFF}$	$V_{SS}-0.3 \sim V_{IN}+0.3$	
Output Voltage	V_{OUT}	$V_{SS}-0.3 \sim V_{IN}+0.3$	
Power Dissipation	P_D	SOT-23-5L	400
Operating Ambient Temperature	T_{opr}	-40~+85	
Storage Temperature	T_{stg}	-40~+125	

Caution: The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.

Electrical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Output Voltage	$V_{OUT(E)}$	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V}$, $I_{OUT} = 30 \text{ mA}$	$V_{OUT(S)} \times 0.98$	$V_{OUT(S)}$	$V_{OUT(S)} \times 1.02$	V
Output Current	I_{OUT}	$V_{IN} \geq V_{OUT(S)} + 1.0 \text{ V}$	300	-	-	mA
Dropout Voltage	V_{drop}	$I_{OUT} = 50 \text{ mA}$	-	0.12	0.20	V
		$I_{OUT} = 100 \text{ mA}$	-	0.30	0.45	
Line Regulations	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	$V_{OUT(S)} + 0.5 \text{ V} \leq V_{IN} \leq 7 \text{ V}$ $I_{OUT} = 30 \text{ mA}$	-	0.10	0.2	%/V
Load Regulation	ΔV_{OUT2}	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V}$ $1.0 \text{ mA} \leq I_{OUT} \leq 100 \text{ mA}$	-	50	100	mV
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_a \cdot V_{OUT}}$	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V}$, $I_{OUT} = 10 \text{ mA}$ $-40^\circ\text{C} \leq T_a \leq 85^\circ\text{C}$	-	± 100	-	ppm/ $^\circ\text{C}$
Supply Current	I_{SS1}	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V}$	-	70	-	μA
Input Voltage	V_{IN}	-	2.0	-	7.0	V
Ripple-Rejection	PSRR	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V}$, $f = 10 \text{ kHz}$ $V_{rip} = 0.5 \text{ V}_{rms}$, $I_{OUT} = 50 \text{ mA}$	-	70	-	dB
Short-circuit Current	I_{short}	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V}$, $V_{CE} \text{ on}$ $V_{OUT} = \text{gnd}$	-	40	-	mA
CE "High" Voltage	V_{CEH}	-	1.6	-	-	V
CE "Low" Voltage	V_{CEL}	-	-	-	0.8	V
CE "High" Current (no resistor built in)	I_{CEH}	$V_{IN} = V_{CE} = V_{OUT(T)} + 1.0 \text{ V}$	-0.1	-	0.1	μA
CE "Low" Current (no resistor built in)	I_{CEL}	$V_{IN} = V_{OUT(T)} + 1.0 \text{ V}$, $V_{CE} = V_{SS}$	-0.1	-	0.1	μA
Inrush Current	I_{RUSH}	$V_{IN} = V_{OUT(T)} + 1 \text{ V}$, $C_L = 47 \mu\text{F}$, $V_{CE} = 0$ $\rightarrow V_{OUT(T)} + 1 \text{ V}$ (Only when rising and within 1ms)			800	mA




TX6211C High Speed Low Dropout Middle Current Voltage Regulators


<http://www.txsemi.com>

Typical Performance Characteristics


1. Quiescent Current VS Input Voltage

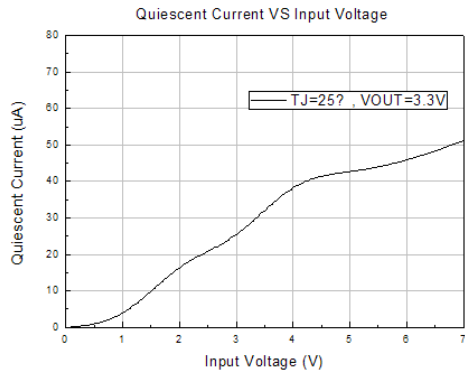


2. Output Voltage VS Input Voltage

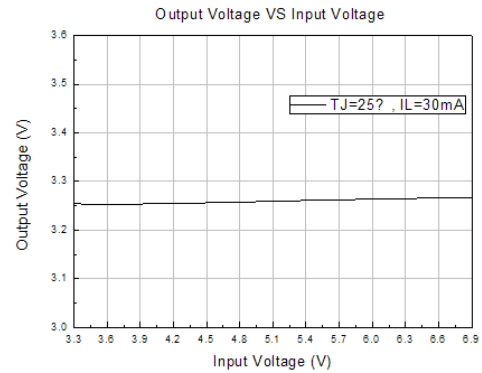


3. Output Current Limit VS Input Voltage

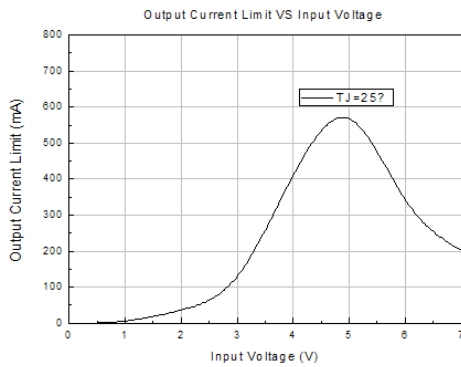


4. GND Pin Current VS Input Voltage

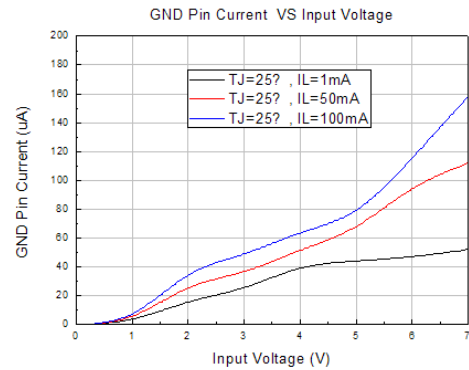

5. GND Pin Current VS Output Current

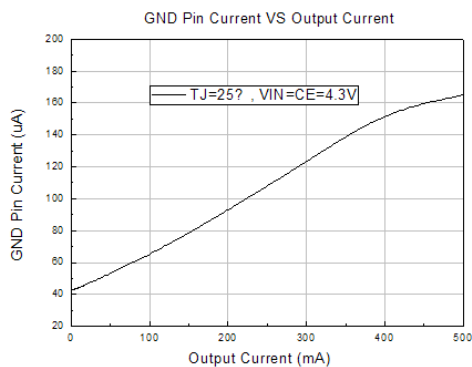

6. Quiescent Current VS Temperature

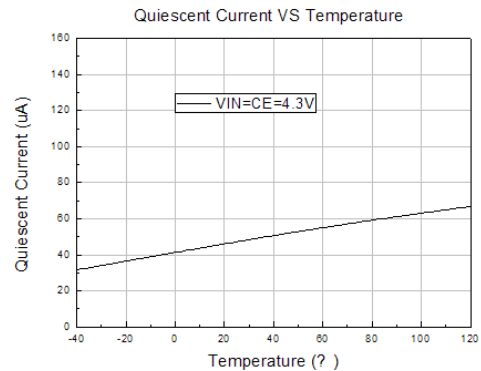





TX6211C High Speed Low Dropout Middle Current Voltage Regulators

<http://www.txsemi.com>


7. Output Current Limit VS Temperature

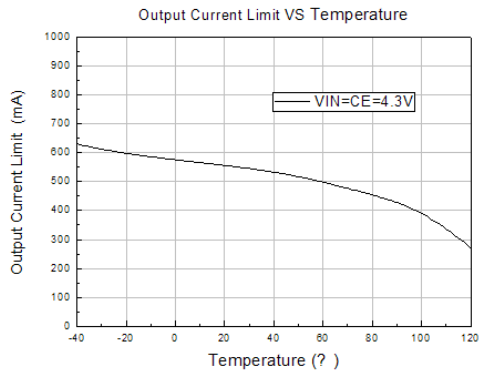


8. Output Voltage VS Temperature

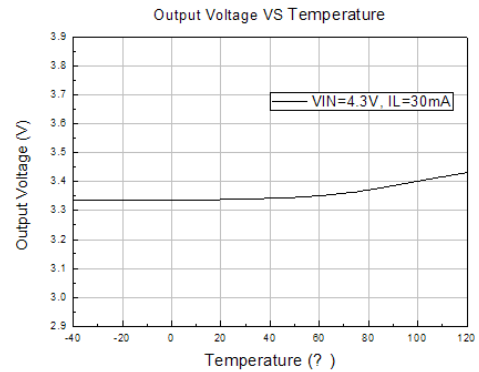


9. Dropout Voltage VS Temperature

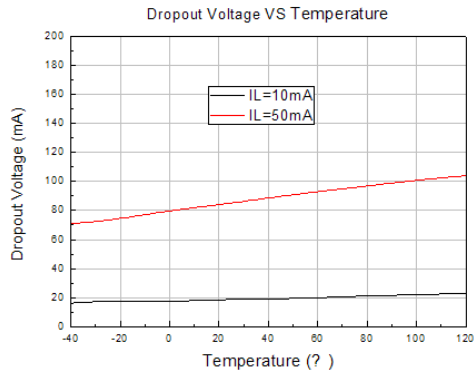


10. CE "High" Voltage VS Temperature

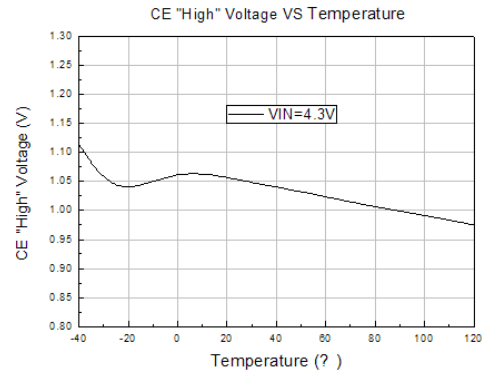

11. CE "Low" Voltage VS Temperature

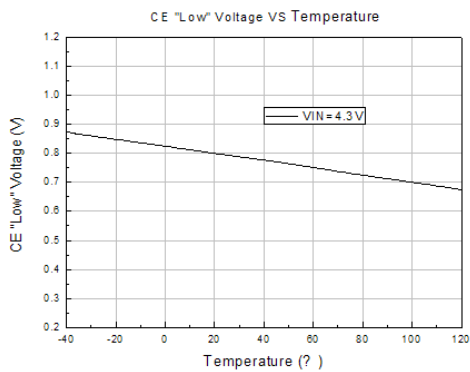

12. Load Regulation VS Temperature

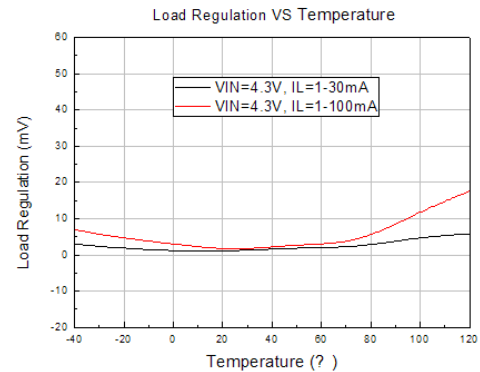





TX6211C High Speed Low Dropout Middle Current Voltage Regulators

<http://www.txsemi.com>


13. Input voltage transient response (IL=30mA)

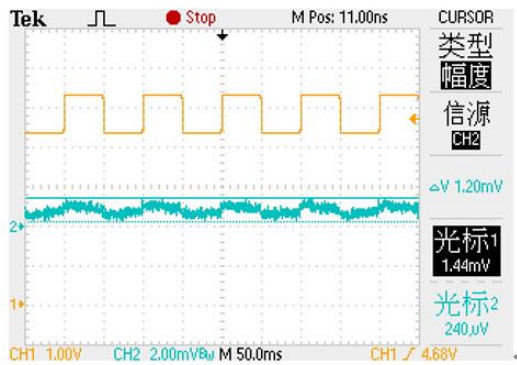


14. Load transient response (IL=0-350-0mA)

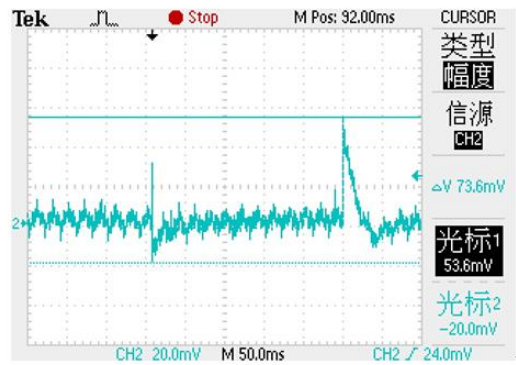


15. Load transient response (IL=10-350-10mA)

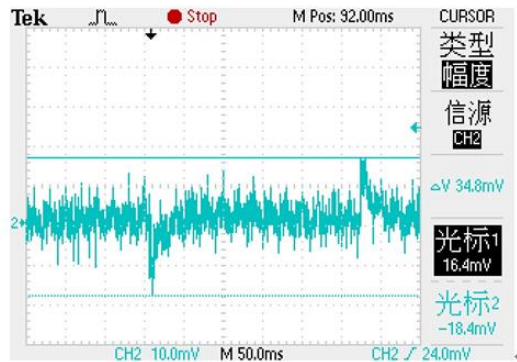

16. Ripple-Rejection (IL=50mA, Vpp=1V, F=1KHZ)

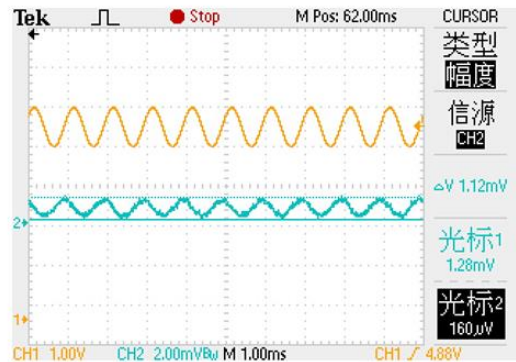

17. CE Opening Time

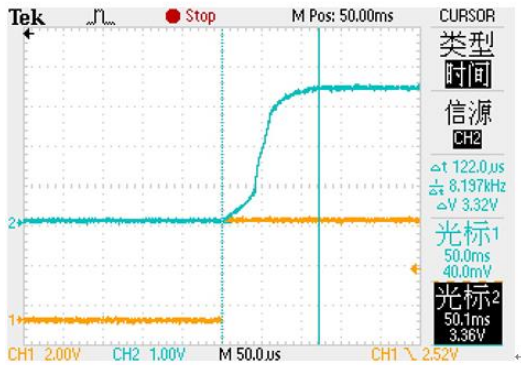

18. CE Turn-off Time



19. Inrush Current






TX6211C High Speed Low Dropout Middle Current Voltage Regulators

<http://www.txsemi.com>

Package Information

- SOT-23-5L

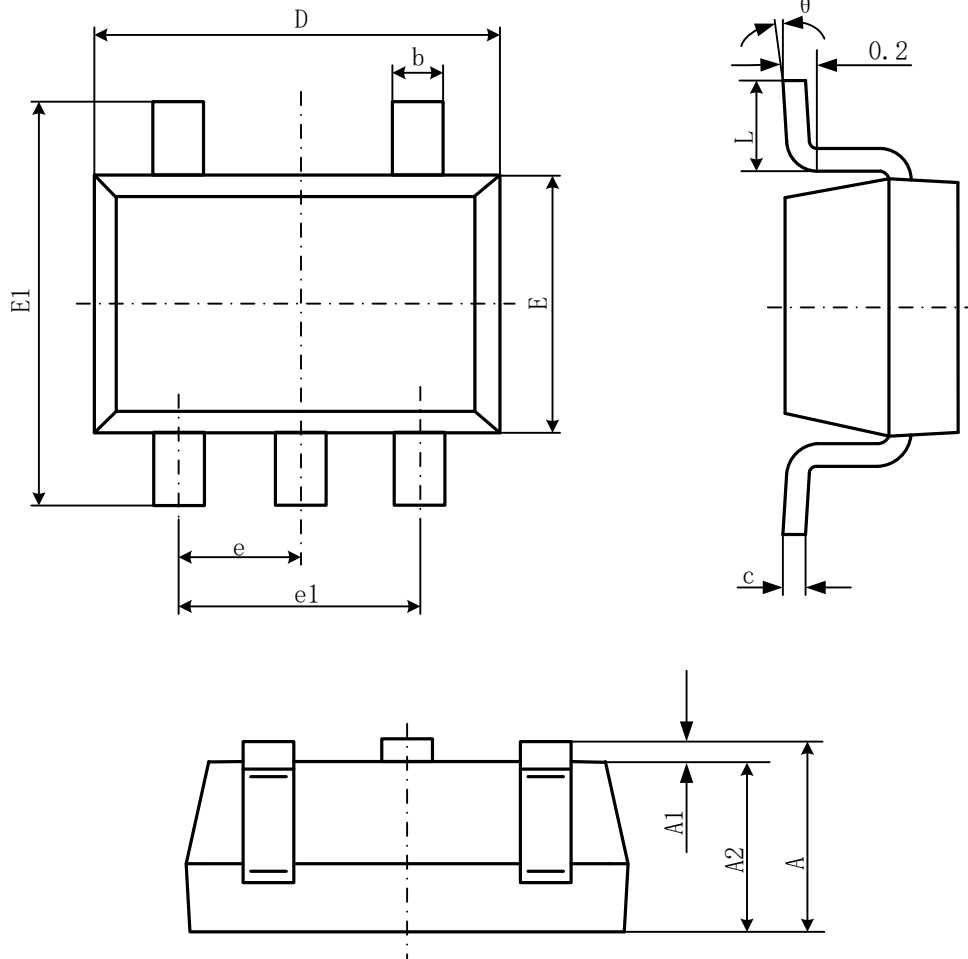

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
theta	0°	8°	0°	8°



TX6211C High Speed Low Dropout Middle Current Voltage Regulators

<http://www.txsemi.com>

© Shanghai TX Electronics Sci-Tech Co., Ltd

TX cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a TX product. No circuit patent license, copyrights or other intellectual property rights are implied. TX reserves the right to make changes to their products or specifications without notice. Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.